



MTM

**COMPOSITION
TABLE.**

CAME 
BPT

CAME.COM



ITEM CODES

MODULES

CODE	ITEM	DESCRIPTION	
60020010	MTMA/01	Audio module X1 System	
60020020	MTMAL/01	Audio lite module for X1 System	
62030010	MTMV/01	Audio-video module for X1 System	
60020040	MTMA/IP	Audio module for IP360 system	
62030020	MTMV/IP	Audio-video module for IP360 system	
60020420	MTMA/08	Audio module for XIP system	
62030060	MTMV/08	Audio-video module for XIP system	
60020210	MTMA/200	Audio module for 200 system	
60020220	MTM8C/200	8-call module for the 200 system	
60020410	MTMA/GSM	Audio module for GSM system	
60020030	MTM8C	Eight-button module	
60020230	MTMKB	Keypad module for digital calls	
60020240	MTMDY	Display module	
60020250	MTMRFID	Proximity reader module	
60020290	MTMMI	Information module	
60020310	MTMMC	Module with blind front piece	
60020380	MTMNA	Keypad module for access control	
60020390	MTMBFVS	Hearing impaired and voice synthesis module	

FRAME WITH PROFILE

CODE	ITEM	DESCRIPTION
60020170	MTMTP1M	Frame with one-module profile
60020180	MTMTP2M	Frame with two-module profile
60020340	MTMTP3M	Frame with three-module profile
60020350	MTMTP4M	Frame with four-module profile

FRAME WITH VR PROFILE

CODE	ITEM	DESCRIPTION
60020740	MTMTP1MVR	Frame with VR one-module profile
60020750	MTMTP2MVR	Frame with VR two-module profile
60020760	MTMTP3MVR	Frame with VR three-module profile
60020770	MTMTP4MVR	Frame with VR four-module profile

FRONT PIECES

CODE	ITEM	DESCRIPTION
60020050	MTMFA0P	Front piece for audio module with no buttons
60020060	MTMFA1P	Front piece for audio module with one button
60020070	MTMFA2P	Front piece for audio module with two buttons
60020080	MTMFAL0P	Front piece for audio lite module with no buttons
60020090	MTMFAL1P	Front piece for audio lite module with one button
60020100	MTMFAL2P	Front piece for audio lite module with two buttons
62030030	MTMFV0P	Front piece for video module with no buttons
62030040	MTMFV1P	Front piece for video module with one button
62030050	MTMFV2P	Front piece for video module with two buttons
60020110	MTMF2P	Front piece for calls module with two buttons
60020120	MTMF3P	Front piece for calls module with three buttons
60020130	MTMF4P	Front piece for calls module with four buttons
60020140	MTMF8P	Front piece for calls module with eight buttons
60020260	MTMFRFID	Front piece for RFID module
60020270	MTMFKB	Front piece for keypad module
60020280	MTMFDY	Front piece for display module
60020300	MTMFMI	Front piece for info module
60020910	MTMFNA	Front piece for access-control keypad module
60020920	MTMFBF	Front piece for the hearing impaired and voice synthesis module

VR FRONT PIECES

CODE	ITEM	DESCRIPTION
60020600	MTMFA0PVR	Front piece for audio module with no VR buttons
60020610	MTMFA1PVR	Front piece for audio module with one VR button
60020620	MTMFA2PVR	Front piece for audio module with two VR buttons
60020630	MTMFAL0PVR	Front piece for audio lite module with no VR buttons
60020640	MTMFAL1PVR	Front piece for audio lite module with one VR button
60020650	MTMFAL2PVR	Front piece for audio lite module with two VR buttons
62030070	MTMFV0PVR	Front piece for video module with no VR buttons
62030080	MTMFV1PVR	Front piece for video module with one VR button
62030090	MTMFV2PVR	Front piece for video module with two VR buttons
60020730	MTMMCVR	Front piece for blind VR module
60020660	MTMF2PVR	Front piece for calls module with two VR buttons
60020670	MTMF3PVR	Front piece for calls module with three VR buttons
60020680	MTMF4PVR	Front piece for calls module with four VR buttons
60020690	MTMF8PVR	Front piece for calls module with eight VR buttons
60020700	MTMFKBVR	Front piece for VR keypad module
60020710	MTMFDYVR	Front piece for VR display module
60020720	MTMFRFIDVR	Front piece for VR RFID access-control module
60020930	MTMFNAVR	Front piece for access-control VR keypad module
60020950	MTMFBFVR	Front piece for the VR hearing impaired and voice synthesis module

RECESS-MOUNTING ACCESSORIES

CODE	ITEM	DESCRIPTION
60020150	MTMSI1M	Recess-mounted installation box for one module
60020160	MTMSI2M	Recess-mounted installation box for two modules
60020320	MTMSI3M	Recess-mounted installation box for three modules
60020330	MTMSI4M	Recess-mounted installation box for four modules
60020490	MTMTI1M	Brim for recess-mounted installation for one module
60020500	MTMTI2M	Brim for recess-mounted installation for two modules
60020510	MTMTI3M	Brim for recess-mounted installation for three modules
60020520	MTMTI4M	Brim for recess-mounted installation for four modules
60020530	MTMTI1M2	Brim for recess-mounted installation for one module x 2
60020540	MTMTI1M3	Brim for recess-mounted installation for one module x 3
60020550	MTMTI1M4	Brim for recess-mounted installation for one module x 4
60020560	MTMTI2M2	Brim for recess-mounted installation for two modules x 2
60020570	MTMTI3M2	Brim for recess-mounted installation for three modules x 2
60020580	MTMTI3M3	Brim for recess-mounted installation for three modules x 3

WALL-MOUNTING ACCESSORIES

CODE	ITEM	DESCRIPTION
60020190	MTMSP1M	Wall-mounting box with brim for one module
60020200	MTMSP2M	Wall-mounting box with brim for two modules
60020360	MTMSP3M	Wall-mounting box with brim for three modules
60020370	MTMSP4M	Wall-mounting box with brim for four modules
60020430	MTMSP1M2	Wall-mounting box with brim for one module x 2
60020440	MTMSP1M3	Wall-mounting box with brim for one module x 3
60020450	MTMSP1M4	Wall-mounting box with brim for one module x 4
60020460	MTMSP2M2	Wall-mounting box with brim for two modules x 2
60020470	MTMSP3M2	Wall-mounting box with brim for three modules x 2
60020480	MTMSP3M3	Wall-mounting box with brim for three modules x 3

ACCESSORIES

CODE	ITEM	DESCRIPTION
60020400	MTMGT	Heater accessory
60020590	MTMEX8C	Eight-button expander module

© CAME SPA - KBCENAR019 - 2019 - EN
CAME reserves the right to make any changes to this document at any time. Even partial reproduction is prohibited.



- We are a leading multinational supplier of integrated high-tech solutions for automating residential, public and urban settings, which generate intelligent spaces for the wellbeing of people.
- GATE OPERATORS

→ VIDEO ENTRY SYSTEMS KIT

→ BURGLAR ALARM SYSTEMS

→ HOME AUTOMATION
- THERMOREGULATION

→ OPERATORS FOR AWNINGS AND SHUTTERS

→ GARAGE AND INDUSTRIAL DOORS

→ AUTOMATIC DOORS
- TURNSTILES AND ACCESS CONTROL

→ BOLLARDS AND PERIMETER SECURITY

→ PARKING SYSTEMS AND ROAD BARRIERS

THE COMPONENTS OF MTM

RECESS-MOUNTING BOX

Available for the various entry panel versions, from 1 to 4 modules, depth 48 mm.

WALL-MOUNTING BOX

A wall-mounting box is available when recess-mounting is not possible.

FRAME

Aluminum module-housing profile with cataphoresis treatment and black paint coat to ensure high levels of endurance against corrosion and rust. Compatible with BTicino, Comelit and Urmet recess-mounting boxes.

FRONT PIECES

Ready-to-use front pieces, in that they are already configured and need no extra buttons or caps. Outer side made of satin-finish aluminum with sturdy internal structure to make the standard outer panel IK07. Also available is the VR version with Zamak IK09 coating.

OUTER FRAME

The closing frame is sleek and essential, entirely made of satin-finished aluminum.

ELECTRONIC MODULES

Snap-in installation with no screw needed. Simple wiring among the modules. No chance of error thanks to the polarized connectors.

CURRENT DRAW TABLE

MTM ELECTRIC CALCULATOR					
SOURCE CAPACITY			LOAD CONSUMPTION		
MTMAL/01	12M	MTM8C	1M		
MTMA/01	12M	MTMKB	2M		
MTMV/01	12M	MTMDY	8M		
MTMA/IP	12M	MTMRFID	2M/0M (local pwr sup.)		
MTMV/IP	12M	MTMMI	1M		
MTMA/GSM	12M	MTMNA	2M/0M (local pwr sup.)		
MTMA/08	12M	MTMBFVS	2M		
MTMV/08	12M	MTMEX8C	1M		

1M = MTM electric consumption unit.

CURRENT DRAW CALCULATION EXAMPLE TABLE

	Item	Quantity	no. M	Item	Quantity	no. M
Source	MTMV/01	1	12M	MTMV/01	1	12M
	MTMDY	1	8M	MTM8C	4	4M
Load	MTMKB	1	2M	MTMDY	1	8M
	MTMRFID	1	2M	MTMKB	1	2M
		Total	12M		Total	14M
Outcome		OK			KO (14M > 12M)	

COMPATIBILITY TABLE

MTM Main modules compatibility	MTM8C	MTMKB	MTMDY	MTMRFID	MTMNA	MTMMI	MTMMC	MTMBFVS	MTMEX8C
MTMAL/01	F			P	P	P	M		F
MTMA/01	F	F	F	F	B	B	M	F	F
MTMV/01	F	F	F	F	B	B	M	F	F
MTMA/IP	F	F	F	F	C	B	M	F	F
MTMV/IP	F	F	F	F	C	B	M	F	F
MTMA/GSM	F	F	F	B	B	B	M	F	F
MTMA/08	F	F	F	F	C	B	M	F	F
MTMV/08	F	F	F	F	C	B	M	F	F
MTMRFID					M		M		
MTMNA				M			M		

F = Functional compatibility

B = Only backlighting adjusting + power supply from modular bus

C = No calls, only backlighting adjusting + power supply from modular bus


Access control with MTM*/IP or VA/08 with connection to CAN bus

P = Only compatibility for power supply from modular bus

M = Only mechanical compatibility

THE MOST WIDESPREAD COMPOSITIONS

	
Video module for X1 system 62030010	Audio module for X1 system 60020010
Video module for XIP system 62030060	Audio module for XIP system 60020420
Video module for IP360 system 62030020	Audio module for IP360 system 60020040
	Audio module for GSM system 60020410

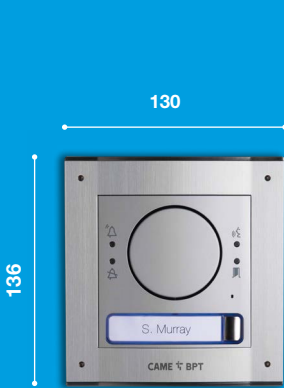

DESCRIPTION	CODE
1 M recess-mounting box	60020150
1 M profile + frame	60020170
Module A for X1 system	60020010
One-button front piece A	60020060




DESCRIPTION	CODE
2 M recess-mounting box	60020160
2 M profile + frame	60020180
A/V module for X1 system	62030010
One-button front piece V	62030040
Eight-button module	60020030
Four-button front piece	60020130



DESCRIPTION	CODE
2 M recess-mounting box	60020160
2 M profile + frame	60020180
A/V module for X1 system	62030010
Blind V front piece	62030030
Eight-button module	60020030
Four-button front piece	60020130



DESCRIPTION	CODE
3 M recess-mounting box	60020320
3 M profile + frame	60020340
A/V module for X1 system	62030010
One-button front piece V	62030040
Eight-button module	60020030
Four-button front piece	60020130
RFID module	60020250
RFID front piece	60020260

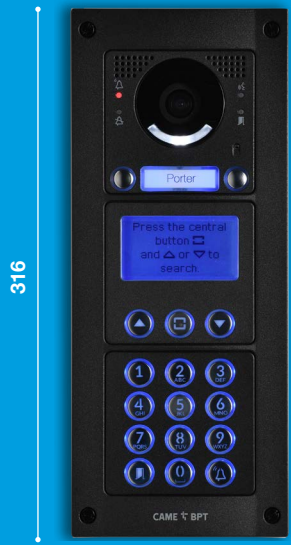

DESCRIPTION	CODE
3 M recess-mounting box	60020320
3 M VR profile + frame	60020760
A/V module for X1 system	62030010
V 2 front piece VR button	62030090
Display module	60020240
VR display front piece	60020710
Keypad module	60020230
VR keypad front piece	60020700



DESCRIPTION	CODE
4 M recess-mounting box	60020330
4 M profile + frame	60020350
A/V module for X1 system	62030010
One-button front piece V	62030040
Display module	60020240
Display front piece	60020280
Keypad module	60020230
Keypad front piece	60020270
Information module	60020290
Info front piece	60020300



DESCRIPTION	CODE
4 M recess-mounting box	60020330
4 M VR profile + frame	60020770
A/V module for X1 system	62030010
V 1 front piece VR button	62030080
Display module	60020240
VR display front piece	60020710
Keypad module	60020230
VR keypad front piece	60020700
RFID module	60020250
RFID VR front piece	60020720

X1 AUDIO X1 COMPOSITION TABLE

		AUDIO MODULE	POWER-SUPPLY UNIT	CALLS MODULE	FRONT PIECES			BUTTONS				RECESS-MOUNTING BOX				FRAME + PLAQUE				ADDITIONAL FUNCTIONS (OPTIONAL)				INTERIOR RECEIVERS
																								UPON CHOICE
number of calls		MTMA/01 Audio module for X1 system	VAS/101 *** Power-supply unit 230 V	MTM8C Module Eight calls	MTMFA0P Blind audio front piece	MTMFA1P Audio front piece 1 button	MTMFA2P Audio front piece 2 buttons	MTMF2P Front piece 2 buttons	MTMF3P Front piece 3 buttons	MTMF4P Front piece 4 buttons	MTMF8P Front piece 8 buttons	MTMSI1M Recess- mounting box 1 module	MTMSI2M Recess- mounting box 2 modules	MTMSI3M Recess- mounting box 3 modules	MTMSI4M Recess- mounting box 4 modules	MTMTP1M Frame + plaque 1 module	MTMTP2M Frame + plaque 2 modules	MTMTP3M Frame + plaque 3 modules	MTMTP4M Frame + plaque 4 modules	MTMRFRID RFID module + frame	MTMNA MTMFNA Access-control module + front piece	MTMBFVS MTMFBF Hearing- impaired module + front piece	MTMMI MTMFMI Module + data front piece	
		60020010	62700011	60020030	60020050	60020060	60020070	60020110	60020120	60020130	60020140	60020150	60020160	60020320	60020330	60020170	60020180	60020340	60020350					
1	1	1	1	0	0	1	0	0	0	0	0	1	0	0	0	1	0	0	0					1
2	1	1	1	0	0	0	1	0	0	0	0	1	0	0	0	1	0	0	0	60020250	60020380	60020390	60020290	2
3	1	1	1	1	1	0	0	0	1	0	0	0	1	0	0	0	1	0	0	60020260	60020910	60020920	60020300	3
4	1	1	1	1	1	0	0	0	0	1	0	0	1	0	0	0	1	0	0					4
5	1	1	1	1	0	1	0	0	0	0	1	0	1	0	0	0	1	0	0					5
6	1	1	1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					6
7	1	1	1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					7
8	1	1	1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					8
9	1	1	1	1	0	0	1	0	0	0	1	0	1	0	0	0	1	0	0					9
10	1	1	1	1	0	0	1	0	0	0	1	0	1	0	0	0	1	0	0					10
11	1	1	1	3	1	0	0	0	1	2	0	0	0	0	1	0	0	0	1					11
12	1	1	1	3	1	0	0	0	0	3	0	0	0	0	1	0	0	0	1	For each additional function added to a door entry panel, consider that the recess-mounting box and the frame will need an extra space for an additional module.				12
13	1	1	1	3	0	1	0	0	0	3	0	0	0	0	1	0	0	0	1					13
14	1	1	1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					14
15	1	1	1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					15
16	1	1	1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					16
17	1	1	1	2	0	0	1	0	0	0	2	0	0	1	0	0	0	1	0					17
18	1	1	1	2	0	0	1	0	0	0	2	0	0	1	0	0	0	1	0					18
19	1	1	1	5	1	0	0	0	1	4	0	0	0	2	0	0	0	2	0					19
20	1	1	1	5	1	0	0	0	0	5	0	0	0	2	0	0	0	2	0					20
56	1	1	1	7	1	0	0	0	0	0	7	0	0	0	2	0	0	0	2					56
90	1	1	1	11	0	0	1	0	0	0	11	0	0	0	3	0	0	0	3					90

*** If you decide to connect an outer video-camera to the MTMA/01 module, use the same power supply unit as used on the VAS/100.30 video-intercom systems.

		AUDIO MODULE	POWER-SUPPLY UNIT	KEYPAD MODULE	DISPLAY MODULE	FRONT PIECES					RECESS-MOUNTING BOX	FRAME + PLAQUE	ADDITIONAL FUNCTIONS (OPTIONAL)				INTERIOR RECEIVERS
																	UPON CHOICE
number of calls		MTMA/01 Audio module for X1 system	VAS/101 *** Power-supply unit 230 V	MTMKB Digital call keypad module	MTMDY Display module	MTMFA0P Blind audio front piece	MTMFA1P Audio front piece 1 button	MTMFA2P Audio front piece 2 buttons	MTMFKB Keypad module front piece	MTMFDY Front piece display module	MTMSI3M Recess- mounting box 3 modules	MTMTP3M Frame + plaque 3 modules	MTMRFRID RFID module + frame	MTMNA MTMFNA Module + front piece access control	MTMBFVS MTMFBF Hearing-impaired module + front piece	MTMMI MTMFMI Module + data front piece	
		60020010	62700011	60020230	60020240	60020050	60020060	60020070	60020270	60020280	60020320	60020340	60020250 60020260	60020380 60020910	60020390 60020920	60020290 60020300	
up to 98	1	1	1	1	1	1	0	0	1	1	1	1	For each additional function added to a door entry panel, consider that the recess-mounting box and the frame will need an extra space for an additional module.				up to 98
98 +P**	1	1	1	1	1	0	1	0	1	1	1	1					up to 98

** P = porter switchboard.

*** If you decide to connect an outer video-camera to the MTMA/01 module, use the same power supply unit as used on the VAS/100.30 video-intercom systems.

RECEIVERS

Complete your system with one of our intercoms.

AGATA		PERLA	
	60240050 AGATA C 60240090 AGATA C F 60240060 AGATA C/B		60540020 PEC NF 60540010 PEC BI

X1 VIDEO X1 COMPOSITION TABLE

		KITS	CALLS MODULE	FRONT PIECES			BUTTONS				RECESS-MOUNTING BOX				FRAME + PLAQUE				ADDITIONAL FUNCTIONS (OPTIONAL)				VIDEO SPLITTER	INTERIOR RECEIVERS
																								UPON CHOICE
number of calls		FREE KIT - MTMVBVM	MTM8C Module Eight calls	MTMFV0P Blank video front piece	MTMFV1P Video front piece 1 button	MTMFV2P Video front piece 2 buttons	MTMF2P Front piece 2 buttons	MTMF3P Front piece 3 buttons	MTMF4P Front piece 4 buttons	MTMF8P Front piece 8 buttons	MTMSI1M Recess-mounting box 1 module	MTMSI2M Recess-mounting box 2 modules	MTMSI3M Recess-mounting box 3 modules	MTMSI4M Recess-mounting box 4 modules	MTMTP1M Frame + plaque 1 module	MTMTP2M Frame + plaque 2 modules	MTMTP3M Frame + plaque 3 modules	MTMTP4M Frame + plaque 4 modules	MTMRFID MTMFRFID RFID module + frame	MTMNA MTMFNA Access-control module + front piece	MTMBFVS MTMFBF Hearing-impaired module + front piece	MTMMI MTMFMI Module + data front piece	XDV/304 * Four-output video splitter	
		62621180	60020030	62030030	62030040	62030050	60020110	60020120	60020130	60020140	60020150	60020160	60020320	60020330	60020170	60020180	60020340	60020350	60020250 60020260	60020380 60020910	60020390 60020920	60020290 60020300	62821300	
1		1	0	0	1	0	0	0	0	0	1	0	0	0	1	0	0	0					1	1
2		1	0	0	0	1	0	0	0	0	1	0	0	0	1	0	0	0					1	2
3		1	1	1	0	0	0	1	0	0	0	1	0	0	0	1	0	0					1	3
4		1	1	1	0	0	0	0	1	0	0	1	0	0	0	1	0	0					1	4
5		1	1	0	1	0	0	0	1	0	0	1	0	0	0	1	0	0					2	5
6		1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					2	6
7		1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					2	7
8		1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					2	8
9		1	1	0	0	1	0	0	0	1	0	1	0	0	0	1	0	0					3	9
10		1	1	0	0	1	0	0	0	1	0	1	0	0	0	1	0	0					3	10
11		1	3	1	0	0	0	1	2	0	0	0	0	1	0	0	0	1					3	11
12		1	3	1	0	0	0	0	3	0	0	0	0	1	0	0	0	1					3	12
13		1	3	0	1	0	0	0	3	0	0	0	0	1	0	0	0	1					4	13
14		1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					4	14
15		1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					4	15
16		1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					4	16
17		1	2	0	0	1	0	0	0	2	0	0	1	0	0	0	1	0					5	17
18		1	2	0	0	1	0	0	0	2	0	0	1	0	0	0	1	0					5	18
19		1	5	1	0	0	0	1	4	0	0	0	2	0	0	0	2	0					5	19
20		1	5	1	0	0	0	0	5	0	0	0	2	0	0	0	2	0					5	20
56		1	7	1	0	0	0	0	0	7	0	0	0	2	0	0	0	2					14	56
90		1	11	0	0	1	0	0	0	11	0	0	0	3	0	0	0	3					23	90

* Every 10 XDV/304, provide a XDV/300A; after 64 receivers, provide a XAS/301.01

		VIDEO MODULE	POWER-SUPPLY UNIT	KEYPAD MODULE	DISPLAY MODULE	FRONT PIECES					RECESS-MOUNTING BOX	FRAME + PLAQUE	ADDITIONAL FUNCTIONS (OPTIONAL)				DISTRIBUTOR VIDEO	INTERIOR RECEIVERS
																		UPON CHOICE
number of calls		MTMV/01 Module audio/video for X1 system	VAS/100.30 Power-supply unit 230 V	MTMKB Digital call keypad module	MTMDY Display module	MTMFV0P Blank video front piece	MTMFV1P Video front piece 1 button	MTMFV2P Video front piece 2 buttons	MTMFKB Keypad module front piece	MTMFDY Front piece display module	MTMSI3M Recess-mounting box 3 modules	MTMTP3M Frame + plaque 3 modules	MTMRFID MTMFRFID Module + front piece RFID	MTMNA MTMFNA Module + front piece access control	MTMBFVS MTMFBF Hearing-impaired module + front piece	MTMMI MTMFMI Module + data front piece	XDV/304 * Video splitter 4 outputs	
		62030010	62703310	60020230	60020240	62030030	62030040	62030050	60020270	60020280	60020320	60020340	60020250 60020260	60020380 60020910	60020390 60020920	60020290 60020300	62821300	
up to 98		1	1	1	1	1	0	0	1	1	1	1					up to 25	up to 98
98 +P**		1	1	1	1	0	1	0	1	1	1	1					up to 25	up to 98

* Every 10 XDV/304, provide a XDV/300A; after 64 receivers, provide a XAS/301.01

** P = porter switchboard

RECEIVERS

Complete your system with one of our intercoms.

XTS	
	840CH-0030 XTS 7 WH WIFI
	840CH-0040 XTS 7 BK WIFI
AGATA	
	62100370 AGATA VC
	62100380 AGATA VC/B
	62100430 AGATA VC BF
	62100440 AGATA VC/B BF
PERLA	
	62100190 PEV NF
	62100240 PEV NF BF
	62100180 PEV BI
	62100230 PEV BI BF
OPALE	
	62100260 OPALE W BLACK
	62100280 OPALE BLACK
	62100250 OPALE W WHITE
	62100270 OPALE WHITE
FUTURA	
	62100530 FUTURA X1 BK
	62100550 FUTURA X2 BK
	62100520 FUTURA X1 WH
	62100540 FUTURA X2 WH

IP360 VIDEO IP360 COMPOSITION TABLE

		VIDEO MODULE	CALLS MODULE	FRONT PIECES			BUTTONS				RECESS-MOUNTING BOX				FRAME + PLAQUE				ADDITIONAL FUNCTIONS (OPTIONAL)				INTERIOR RECEIVERS
																							UPON CHOICE
number of calls		MTMV/IP Audio/video module for the IP360 system	MTM8C Module Eight calls	MTMFV0P Blank video front piece	MTMFV1P Video front piece 1 button	MTMFV2P Video front piece 2 buttons	MTMF2P Front piece 2 buttons	MTMF3P Front piece 3 buttons	MTMF4P Front piece 4 buttons	MTMF8P Front piece 8 buttons	MTMSI1M Recess-mounting box 1 module	MTMSI2M Recess-mounting box 2 modules	MTMSI3M Recess-mounting box 3 modules	MTMSI4M Recess-mounting box 4 modules	MTMTP1M Frame + plaque 1 module	MTMTP2M Frame + plaque 2 modules	MTMTP3M Frame + plaque 3 modules	MTMTP4M Frame + plaque 4 modules	MTMRFID MTMFRFID RFID module + frame	MTMNA MTMFNA Access-control module + front piece	MTMBFVS MTMFBF Hearing-impaired module + front piece	MTMMI MTMFMI Module + data front piece	
		62030020	60020030	62030030	62030040	62030050	60020110	60020120	60020130	60020140	60020150	60020160	60020320	60020330	60020170	60020180	60020340	60020350	60020250 60020260	60020380 60020910	60020390 60020920	60020290 60020300	
1		1	0	0	1	0	0	0	0	0	1	0	0	0	1	0	0	0					1
2		1	0	0	0	1	0	0	0	0	1	0	0	0	1	0	0	0					2
3		1	1	1	0	0	0	1	0	0	0	1	0	0	0	1	0	0					3
4		1	1	1	0	0	0	0	1	0	0	1	0	0	0	1	0	0					4
5		1	1	0	1	0	0	0	1	0	0	1	0	0	0	1	0	0					5
6		1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					6
7		1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					7
8		1	1	1	0	0	0	0	0	1	0	1	0	0	0	1	0	0					8
9		1	1	0	0	1	0	0	0	1	0	1	0	0	0	1	0	0					9
10		1	1	0	0	1	0	0	0	1	0	1	0	0	0	1	0	0					10
11		1	3	1	0	0	0	1	2	0	0	0	0	1	0	0	0	1					11
12		1	3	1	0	0	0	0	3	0	0	0	0	1	0	0	0	1					12
13		1	3	0	1	0	0	0	3	0	0	0	0	1	0	0	0	1					13
14		1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					14
15		1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					15
16		1	2	1	0	0	0	0	0	2	0	0	1	0	0	0	1	0					16
17		1	2	0	0	1	0	0	0	2	0	0	1	0	0	0	1	0					17
18		1	2	0	0	1	0	0	0	2	0	0	1	0	0	0	1	0					18
19		1	5	1	0	0	0	1	4	0	0	0	2	0	0	0	2	0					19
20		1	5	1	0	0	0	0	5	0	0	0	2	0	0	0	2	0					20
56		1	7	1	0	0	0	0	0	7	0	0	0	2	0	0	0	2					56
90		1	11	0	0	1	0	0	0	11	0	0	0	3	0	0	0	3					90

The front piece is powered directly by a PoE switch or by the local power supply.

	VIDEO MODULE	KEYPAD MODULE	DISPLAY MODULE	FRONT PIECES				RECESS-MOUNTING BOX	FRAME + PLAQUE	ADDITIONAL FUNCTIONS (OPTIONAL)				INTERIOR RECEIVERS	
															UPON CHOICE
	MTMV/IP Audio/video module for IP360 system	MTMKB Digital call keypad module	MTMDY Display module	MTMFV0P Blank video front piece	MTMFV1P Video front piece 1 button	MTMFV2P Video front piece 2 buttons	MTMFKB Keypad module front piece	MTMFDY Front piece display module	MTMSI3M Recess-mounting box 3 modules	MTMTP3M Frame + plaque 3 modules	MTMRFID MTMFRFID Module + front piece RFID	MTMNA MTMFNA Module + front piece access control	MTMBFVS MTMFBF Hearing-impaired module + front piece	MTMMI MTMFMI Module + data front piece	
	62030020	60020230	60020240	62030030	62030040	62030050	60020270	60020280	60020320	60020340	60020250 60020260	60020380 60020910	60020390 60020920	60020290 60020300	
up to 7200	1	1	1	1	0	0	1	1	1	1	For each additional function added to a video entry panel, consider that the recess-mounting box and the frame will need an extra space for an additional module.				up to 7,200
up to 7200 +P**	1	1	1	0	1	0	1	1	1	1					up to 7,200

** P = porter switchboard.

The front piece is powered directly by a PoE switch or by the local power supply.

RECEIVERS

Complete your system with one of our intercoms.



840CH-0060
XTS 7IP WH WIFI



840CH-0090
XTS 5IP WH



840CH-0070
XTS 7IP BK WIFI



840CH-0100
XTS 5IP BK



62100570
FUTURA IP BK



62100560
FUTURA IP WH